



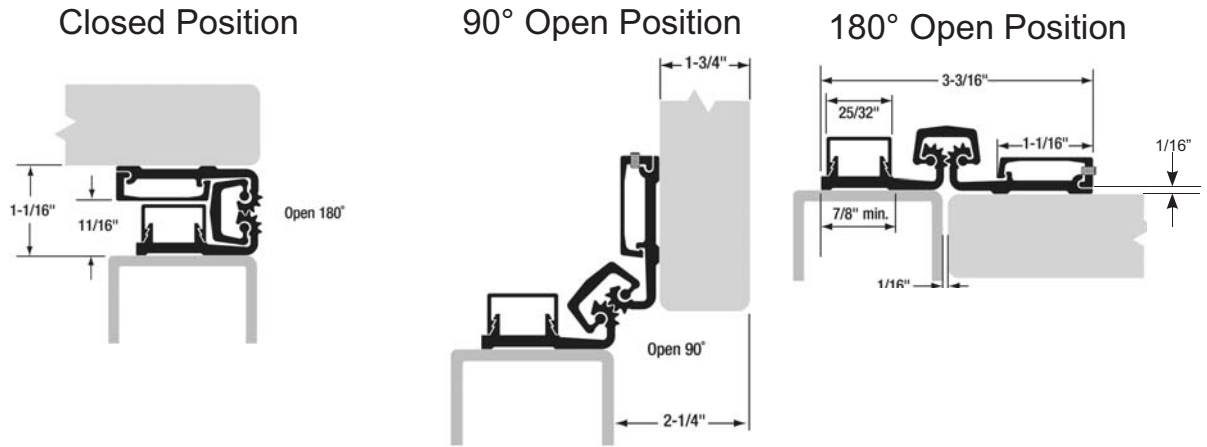

# CG33N HEAVY DUTY SERIES

## FULL SURFACE NARROW FRAME 1/16" INSET

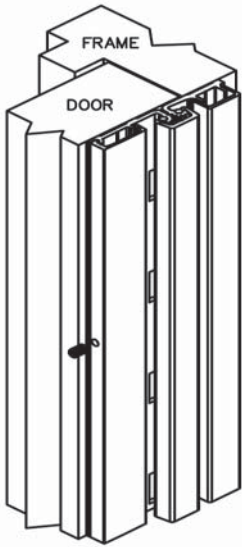

- ◆ For new construction
- ◆ For use on flush aluminum, glass rail, hollow metal or wood doors
- ◆ For permanent replacement of existing doors and frames
- ◆ No mortising of doors or frames required
- ◆ Will cover butt hinge cutouts in old frames
- ◆ Full Surface
- ◆ Requires 7/8" minimum frame size
- ◆ 1/16" inset
- ◆ Material - Extruded 6063-T6 Aluminum Alloy w/ Polyester thrust bearings
- ◆ Can manufacturer hole sizes & locations per customers specs
- ◆ No door reinforcement required
- ◆ For doors up to 450 lbs.
- ◆ Template and hole pattern is same from hinge to hinge
- ◆ 83" can be field cut to 79" without cutting thru a bearing or mounting holes
- ◆ Hinge is non-handed unless cut in the field
- ◆ Can be UL listed for up to 3 hours

PBB Model Number	Length		Screw Count	
	Inches	Centimeters	Door	Jamb
CG33N83	83"	210.8	10	14
CG33N85	85"	215.9	10	14
CG33N95	95"	241.3	11	15
CG33N120	120"	304.8	14	18

628 - CLEAR ANODIZED - US28

710 - DARK ANODIZED - US10B

Full Surface Fasteners-	
<b>Screw Pack D</b> 1/4-20 x 1-1/2" Sexbolt and Screw	